



STUDMOUNTS, Series DS

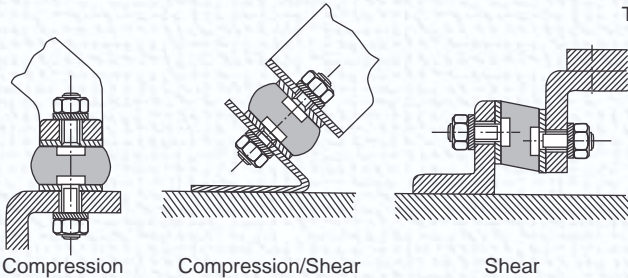

ASSEMBLY

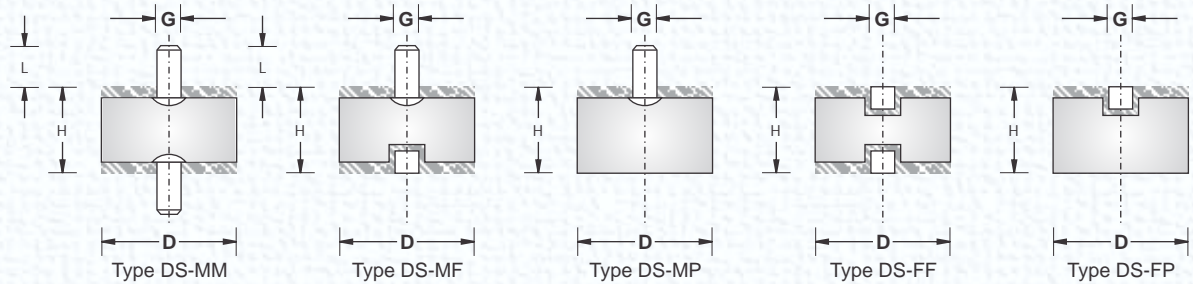

DYNEMECH Stud Mounts, Series DS are highly effective and compact vibration dampers for a variety of applications like - Compressors, Pumps, ID & FD fans, Motors, Machine tools, Gensets, Air Conditioners, Measuring and Testing Equipments /Instruments, Material Handling Equipments, Laboratory Equipments etc. These mounts can be used for load applications in both compression and shear.

MODEL	D mm	H mm	G Thread	L mm	LOAD Kgs.	NATURAL FREQUENCY Hz
DS a 10-10	10	10	M4	10	2	12
DS b 10-10	10	10	M4	10	4	15
DS c 10-10	10	10	M4	10	6.5	15
DS a 15-15	15	15	M4	10	4	12
DS b 15-15	15	15	M4	10	9	12
DS c 15-15	15	15	M4	10	15	12
DS a 20-15	20	15	M6	13	9	12
DS b 20-15	20	15	M6	13	18	12
DS c 20-15	20	15	M6	13	25	12
DS a 20-25	20	25	M6	13	7	10
DS b 20-25	20	25	M6	13	16	10
DS c 20-25	20	25	M6	13	24	12
DS a 25-25	25	25	M8	20	12	12
DS b 25-25	25	25	M8	20	28	12
DS c 25-25	25	25	M8	20	39	12
DS a 25-30	25	30	M8	20	10	9
DS b 25-30	25	30	M8	20	22	9
DS c 25-30	25	30	M8	20	30	9
DS a 30-30	30	30	M8	20	17	8
DS b 30-30	30	30	M8	20	37	8
DS c 30-30	30	30	M8	20	57	9
DS a 40-30	40	30	M10	25	34	7
DS b 40-30	40	30	M10	25	70	8
DS c 40-30	40	30	M10	25	110	8
DS a 40-40	40	40	M10	25	30	7
DS b 40-40	40	40	M10	25	60	8
DS c 40-40	40	40	M10	25	95	8
DS a 50-45	50	45	M10	25	55	8
DS b 50-45	50	45	M10	25	110	8
DS c 50-45	50	45	M10	25	160	8
DS a 60-25	60	25	M10	30	85	6
DS b 60-25	60	25	M10	30	170	7
DS c 60-25	60	25	M10	30	250	7
DS a 60-45	60	45	M10	30	75	7
DS b 60-45	60	45	M10	30	150	7
DS c 60-45	60	45	M10	30	200	7
DS a 75-55	75	55	M16	30	125	6
DS b 75-55	75	55	M16	30	275	7
DS c 75-55	75	55	M16	30	400	7
DS a 100-55	100	55	M16	45	250	7
DS b 100-55	100	55	M16	45	500	7
DS c 100-55	100	55	M16	45	750	7
DS a 150-55	150	55	M16	50	450	7
DS b 150-55	150	55	M16	50	800	8
DS c 150-55	150	55	M16	50	1300	8