
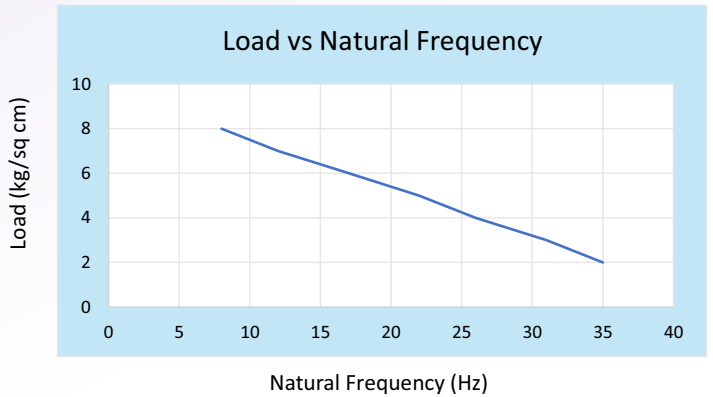


Article Information :

Dynemech Anti-vibration Ds2 Insulation Plate is made from high grade synthetic composite material. This sheet is resistant to water, oils, lubricating oils, fuels, etc. used in shop floor. This sheet has defined stress value and can be placed directly under the machine as per the weight of the machine and no. of mounting positions. This sheet will not deform plastically, if the weight of machine does not exceed maximum load value of this insulation plate.

Applications:

High vibration insulation for both active and passive range, medium presses, stamping machine, also well suited for high speed rotating machine on upper floors.

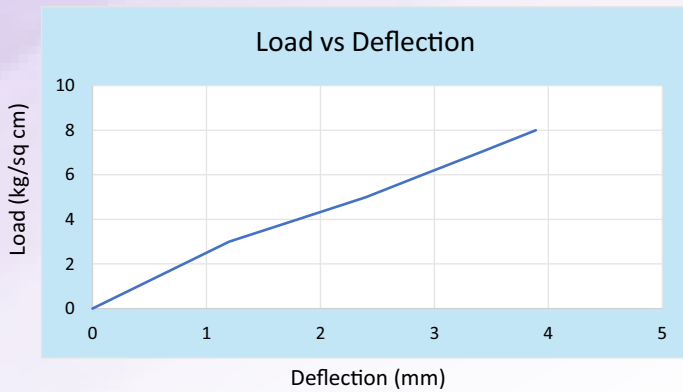

Technical Data	
Load (Kg/ sq cm)	02-08
Thickness (mm)	25
Coeff. of Friction	0.8
Shore A Hardness	80-82
Natural Frequency (Hz)	8-35
Working Temp Range °C	-20 to +70
Oil & Chemical Resistance	Resistant to fuels, lubricating oils, water etc. used in the shop floor
Construction	Composite material made from Nitrile Rubber, Cork Particles & polyester Fiber The composite material ensures high damping capacity, High compressive strength & high load capacities

