



WEDGE MOUNTS, Series DTP (BOLT Thru)

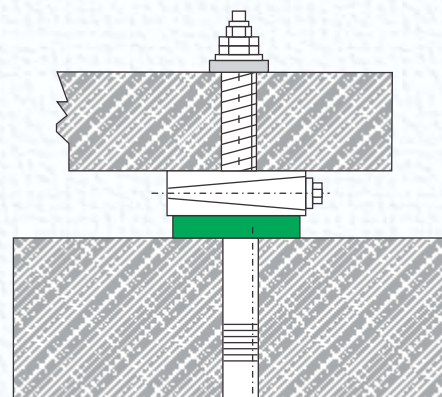

Series DTP

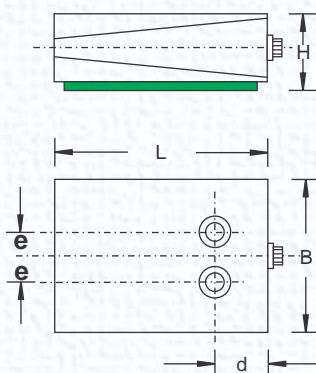

TPM Series Mounts are designed for industrial machines that require the machines to be placed at a height of 100mm / 150mm for proper cleaning and repairing under the machine as per IMTMA guidelines. Series DTP are designed for machines which are top heavy or have eccentric motion or machines which must be anchored to the ground.

Range of Applications:

Drilling and milling machines, machining centres, special machines, long lathes, long planers, power presses etc

Model	Load Kg/pc	Length (L) mm	Width (B) mm	Height (H) at mean position (mm)	d (mm)	e (mm)	bore Ø(mm)	Adjst. range (mm)
DTP1-u	1100	115	115	100/150	50	24	22	8
DTP2-u	1800	150	150	100/150	60	23	22	10
DTP3-u	3200	200	200	100/150	75	27	28	12
DTP4-u	4000	200	250	100/150	95	27	28	18
DTP5-u	6400	250	320	100/150	125	55	28	18
DTP6-u	9600	300	400	100/150	148	50	30	20
DTP1-m	1400	115	115	100/150	50	24	22	8
DTP2-m	2200	150	150	100/150	60	23	22	10
DTP3-m	4000	200	200	100/150	75	27	28	12
DTP4-m	5000	200	250	100/150	95	27	28	18
DTP5-m	8000	250	320	100/150	125	55	28	18
DTP6-m	12000	300	400	100/150	148	50	30	20
DTP1-i	1800	115	115	100/150	50	24	22	8
DTP2-i	2900	150	150	100/150	60	23	22	10
DTP3-i	5200	200	200	100/150	75	27	28	12
DTP4-i	6500	200	250	100/150	95	27	28	18
DTP5-i	10000	250	320	100/150	125	55	28	18
DTP6-i	15000	300	400	100/150	148	50	30	20
DTP1-s2	950	115	115	100/150	50	24	22	8
DTP2-s2	1600	150	150	100/150	60	23	22	10
DTP3-s2	2800	200	200	100/150	75	27	28	12
DTP4-s2	3500	200	250	100/150	95	27	28	18
DTP5-s2	5500	250	320	100/150	125	55	28	18
DTP6-s2	8500	300	400	100/150	148	50	30	20

DYNEMECH INSULATING DISCS

FOR ANCHORING APPLICATIONS



BOLT SIZE	OD Ø	ID Ø	THICKNESS (mm)
M16	40	17	25
M20	52	21	25
M30	75	31	25